



EXTEND YOUR OUTDOOR ADVENTURES LONG INTO THE EVENING.
BY LOUVRETEC SYDNEY NORTH | NEWCASTLE

220/35 SLIMLINE ROOF

A Multi-purpose Louvre blade compatible as a Standard Spiral Pivot Roof as well as a Retract

Perfect for most Installations

The multi-purpose 220/35 Slimline Opening/Retract Roof replaces the 200 Super Roof Lite, and we believe it will be our most used system.


The sleek, clean modern design provides excellent spanning capacity for the majority of residential installations.

Key Features


- Sleek, functional design, clean and uncluttered when open or closed
- Design strength of an extruded double box-section
- Somfy powered or hand-operated award winning Spiral Pivot operating system
- "Cushion Closing" onto an external sun-resistant PVC bulb seal
- Increased closing cover angle for added weather protection
- Larger blade gutter incorporated for extra stormwater dispersal



220/35 SLIMLINE ROOF BLADE
Available Spiral Pivot or Retract

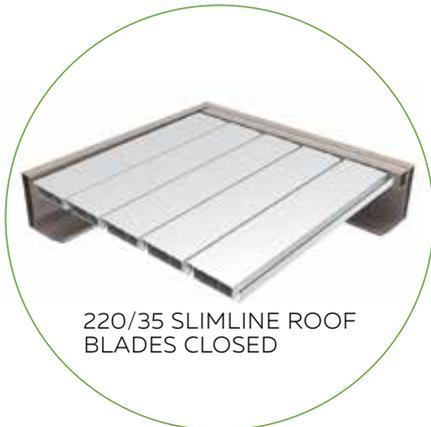

220/35 SLIMLINE ROOF
BLADES CLOSED

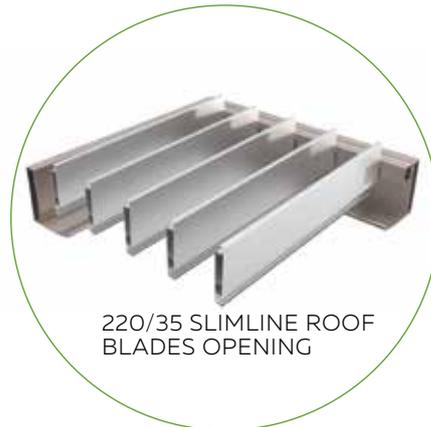

220/35 SLIMLINE ROOF
BLADES OPENING

MOTORISED OR HAND OPERATED

Controller and
Sensor Options
Refer Pages
2.17 - 2.18
for range of options



SURFACE FINISHING OPTIONS


A wide range of options are available.



OPENING ROOFS SPECIFICATIONS



BLADE SPECIFICATIONS 220/35 SLIMLINE ROOF (RETRACT COMPATIBLE)

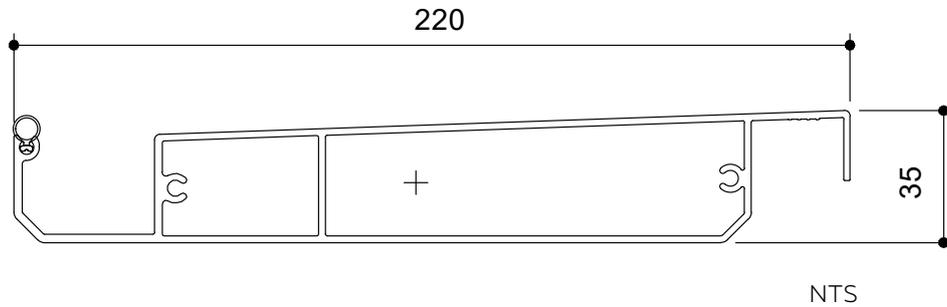

BLADE SPECIFICATIONS			
Blade cover - opening system	205 mm	Weight per linear metre - opening system	2.655 kg/lm
Weight per square metre - opening system	12.9 kg/sqm	Actual blade width	220 mm
Blade centres - opening system	205 mm		

SPANS AT A GLANCE

Refer Engineering Section. Climate, terrain, shielding, location, type of structure contribute to determine spans.

WIND ZONE	INSIDE	LOW	MEDIUM	HIGH	VERY HIGH	EXTRA HIGH
Factored wind speed at building	Self wt	32 m/s	37m/s	44 m/s	50 m/s	55 m/s
		115 km/hr	133 km/hr	158 km/hr	179 km/hr	198 km/hr
220/35 Slimline Roof 3m Height	4300	4300	4300	4200	4000	3500
220/35 Slimline Roof 6m Height		4300	4300	4050	3500	3150

INSTALLATION OPTIONS



CALCULATE OPTIMUM FRAME
OPENING SIZES FOR SPIRAL PIVOT

Span: Check engineering span limits
Pivot: Calculation example showing 17 blades

STEP 1


16 blades x 205 Crs	3280
1 blade at 220 (blade size)	+ 220
17 blades	=3500

STEP 2


Blade cover	3500
+2/22mm clearance @ ends	=44
Total exact pivot length	=3544

Extra width 185mm gutter provides cover if clearance increases over 22mm at ends.
Blade direction either Right Hand up or Left Hand up.


CHOOSE DIRECTION OF BLADE PIVOT

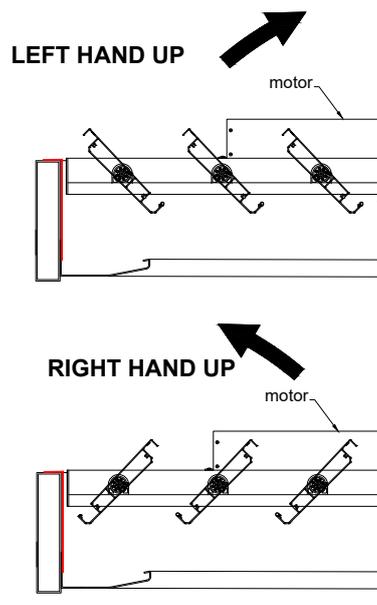

**TYPICAL DETAIL: MOTORISED 220/35 SLIMLINE ROOF
WITHIN LOUVRETEC STRUCTURAL FRAME**

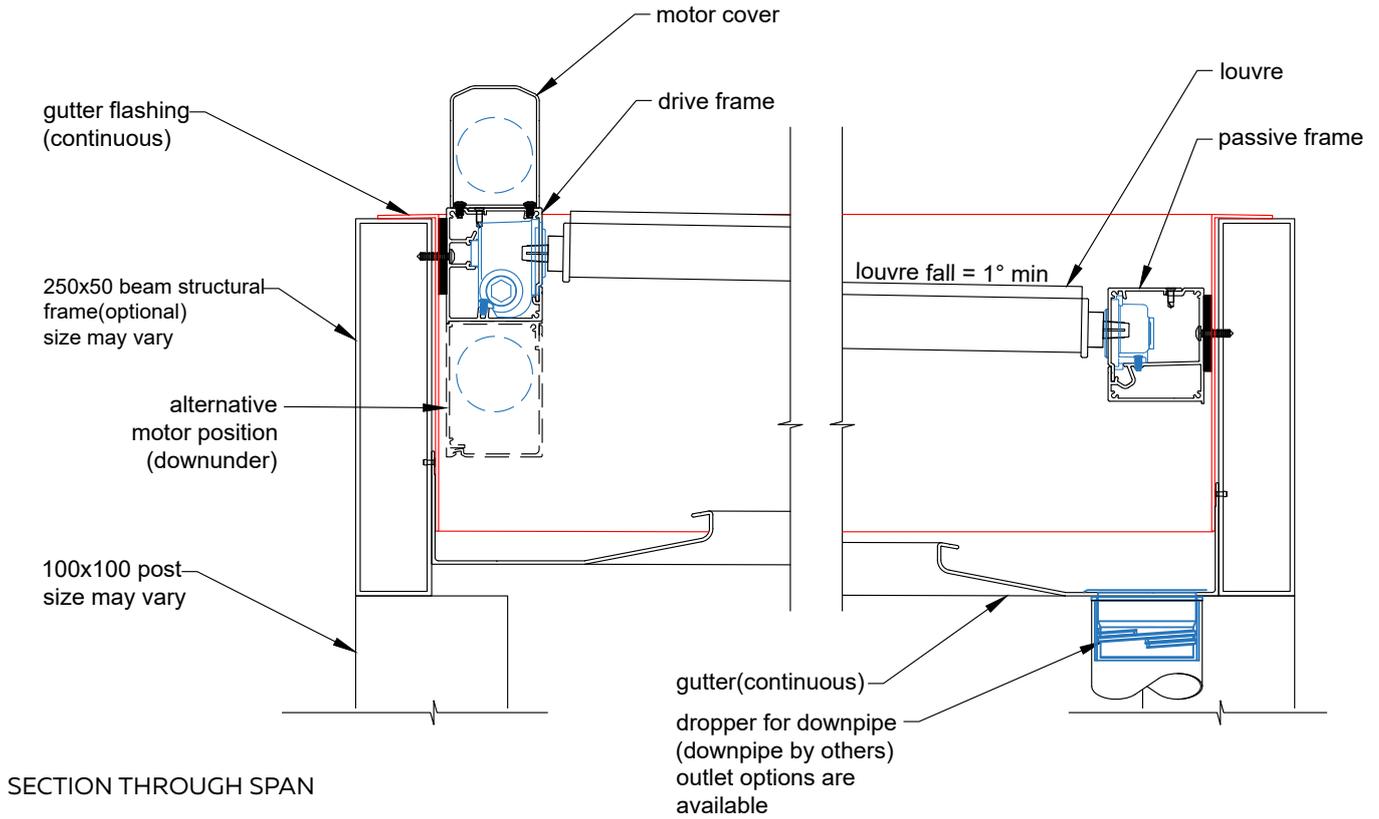

SECTION THROUGH SPAN

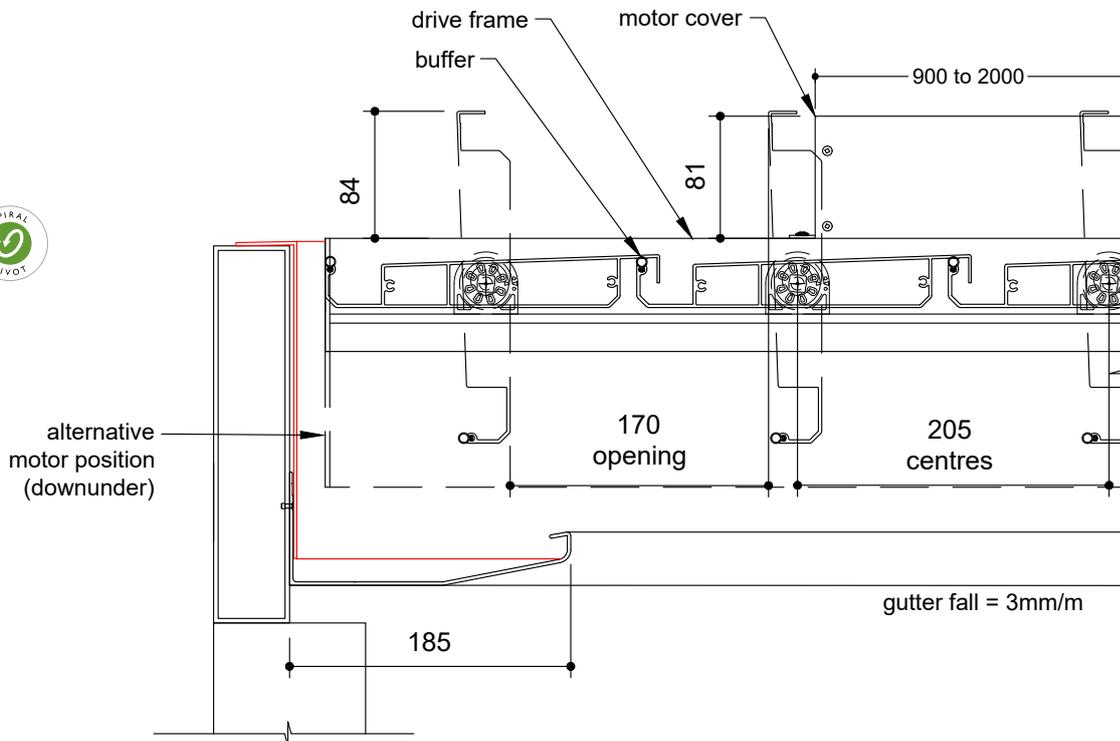

SECTION THROUGH LOUVRES

**TYPICAL DETAIL : MANUAL 220/35 SLIMLINE ROOF
WITHIN LOUVRETEC STRUCTURAL FRAME**

