



BLADE SPECIFICATIONS 300MM MAXI LOUVRE

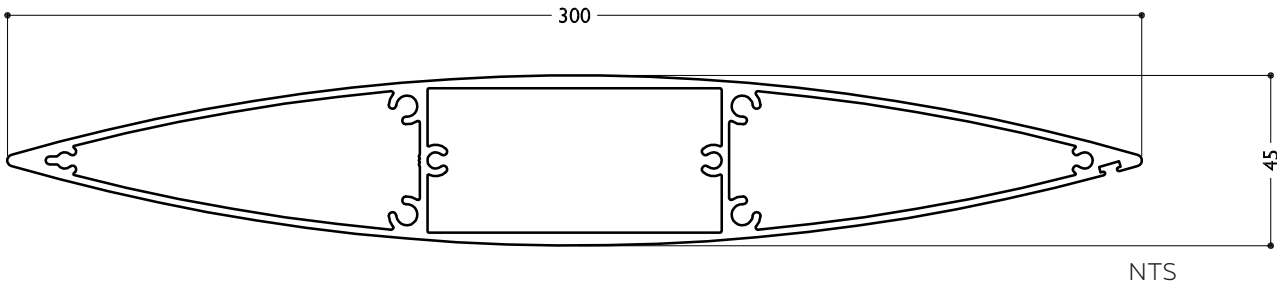


BLADE SPECIFICATIONS 300mm MAXI LOUVRE			
Blade cover - opening system	288 mm	Weight per linear metre - opening system	5.66 kg/lm
Weight per square metre - opening system	19.64 kg/sqm	Actual blade width	300 mm
Blade centres - opening system	288 mm		

SPANS AT A GLANCE NB:
Refer Engineering Section. Climate, terrain, shielding, location, type of structure contribute to determine spans.

WIND ZONE	INSIDE	LOW	MEDIUM	HIGH	VERY HIGH	EXTRA HIGH
Factored wind speed at building	Self wt	32 m/s 115 km/hr	37m/s 133 km/hr	44 m/s 158 km/hr	50 m/s 179 km/hr	55 m/s 198 km/hr
Ultimate limit state loads (kPa)		+0.92 & -1.15	+1.23 & -1.53	+1.74 & -2.17	+2.24 & -2.80	+2.71 & -3.39
Adjustable & Fixed Horizontal & Vertical	4800	4800	4800	4200	3700	3350



BLADE SPECIFICATIONS 600MM MAXI LOUVRE

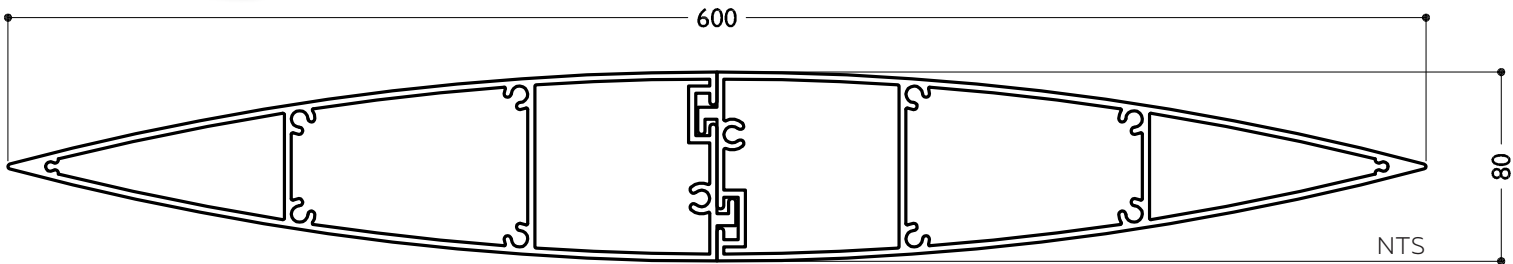

BLADE SPECIFICATIONS 600MM MAXI LOUVRE			
Blade cover - opening system	588 mm	Weight per linear metre - opening system	14.74 kg/lm
Weight per square metre - opening system	24.62 kg/sqm	Actual blade width	600 mm
Blade centres - opening system	588 mm		

SPANS AT A GLANCE NB:
Refer Engineering Section. Climate, terrain, shielding, location, type of structure contribute to determine spans.

WIND ZONE	INSIDE	LOW	MEDIUM	HIGH	VERY HIGH	EXTRA HIGH
Factored wind speed at building	Self wt	32 m/s 115 km/hr	37m/s 133 km/hr	44 m/s 158 km/hr	50 m/s 179 km/hr	55 m/s 198 km/hr
Ultimate limit state loads (kPa)		+0.92 & -1.15	+1.23 & -1.53	+1.74 & -2.17	+2.24 & -2.80	+2.71 & -3.39
	5800	5800	5600	4700	4100	3700