


SUN LOUVRES END FIXED

RL600 SQUARE LOUVRE & RL600 MITRE LOUVRE


(GROUP 6 LOUVRES COLLECTION)



BLADE SPECIFICATIONS RL600 SQUARE & RL600 MITRE LOUVRES

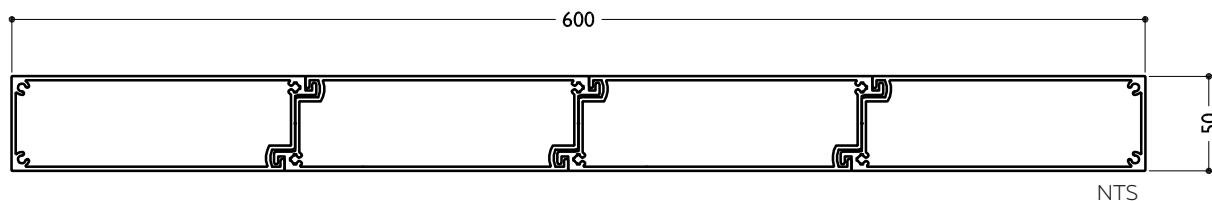

RL600 SQUARE LOUVRE

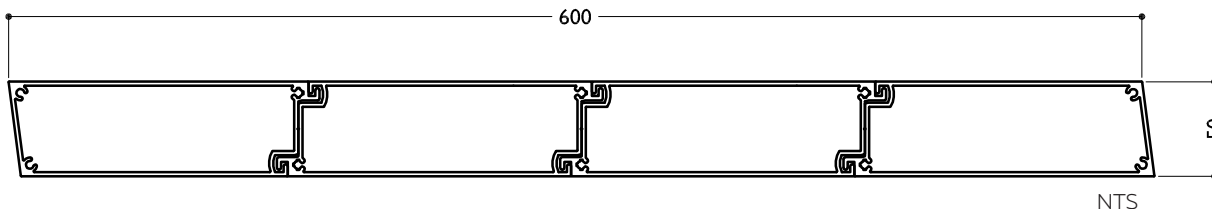

RL600 MITRE LOUVRE

BLADE SPECIFICATIONS			
Blade cover - opening system	607 mm	Weight per linear metre - opening system	11.10 kg/lm
Weight per square metre - opening system	19.0 sqm	Actual blade width	600 mm
Blade centres - opening system	607 mm		

SPANS AT A GLANCE NB:

Refer Engineering Section. Climate, terrain, shielding, location, type of structure contribute to determine spans.

WIND ZONE	INSIDE	LOW	MEDIUM	HIGH	VERY HIGH	EXTRA HIGH
Factored wind speed at building	Self wt	32 m/s 115 km/hr	37m/s 133 km/hr	44 m/s 158 km/hr	50 m/s 179 km/hr	55 m/s 198 km/hr
Ultimate limit state loads (kPa)		+0.92 & -1.15	+1.23 & -1.53	+1.74 & -2.17	+2.24 & -2.80	+2.71 & -3.39
Adjustable & Fixed Horizontal & Vertical	5800	5800	5800	5100	4500	4050

INSTALLATION OPTIONS



END FIXED

Louvres at any pitch
Louvres at any centre



BRACKET FIXED

Louvres at any pitch
Louvres at any centre