


GROUP 6 LOUVRES


Rectangular RL300 SQUARE, RL450 SQUARE, RL 600 SQUARE

RL300 SQUARE LOUVRE

Rectangular in length with square corners



REFER TECHNICAL DETAILS
PAGES 10.4.40

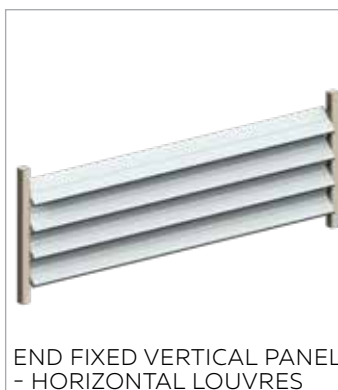


END FIXED VERTICAL PANEL
- HORIZONTAL LOUVRES



RL300 SQUARE LOUVRE

RL450 SQUARE LOUVRE

Rectangular in length with square corners

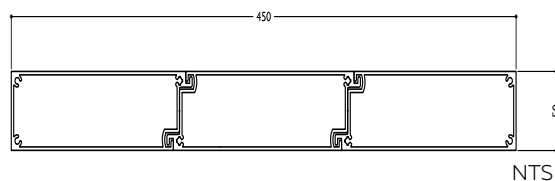

REFER TECHNICAL DETAILS
PAGES 10.4.41




END FIXED
OVERHEAD PANEL
- HORIZONTAL LOUVRES



RL450 SQUARE LOUVRE

RL600 SQUARE LOUVRE

Rectangular in length with square corners

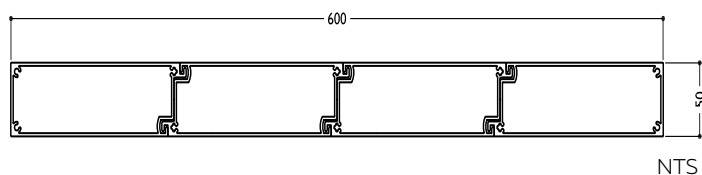

REFER TECHNICAL DETAILS
PAGES 10.4.42



END FIXED VERTICAL PANEL
- VERTICAL LOUVRES




RL600 SQUARE LOUVRE

GROUP 6 LOUVRES

Rectangular RL300 MITRE, RL450 MITRE, RL600 MITRE

RL300 MITRE LOUVRE

Rectangular in length with mitred corners

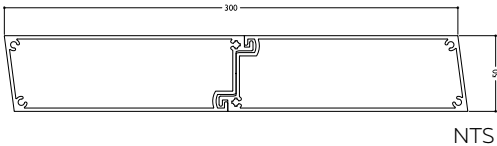


REFER TECHNICAL DETAILS
PAGES 10.4.40



RL450 MITRE LOUVRE

Rectangular in length with mitred corners

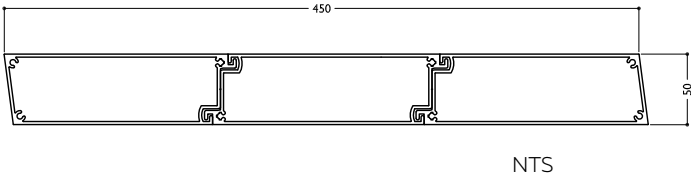


REFER TECHNICAL DETAILS
PAGES 10.4.41



RL600 MITRE LOUVRE

Rectangular in length with mitred corners

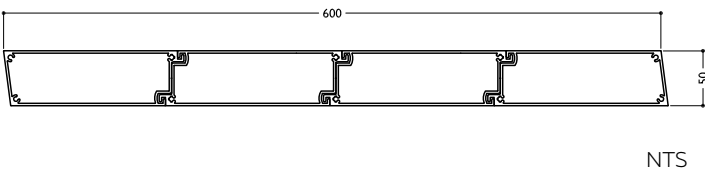

REFER TECHNICAL DETAILS
PAGES 10.4.42




SUN LOUVRES END FIXED
RL300 SQUARE LOUVRE & RL300 MITRE LOUVRE

(GROUP 6 LOUVRES COLLECTION)




BLADE SPECIFICATIONS RL300 SQUARE & RL300 MITRE LOUVRES

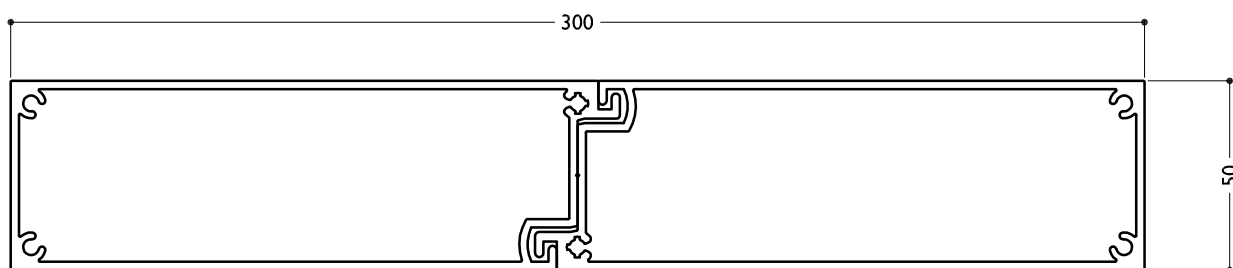

RL300 SQUARE LOUVRE

NTS

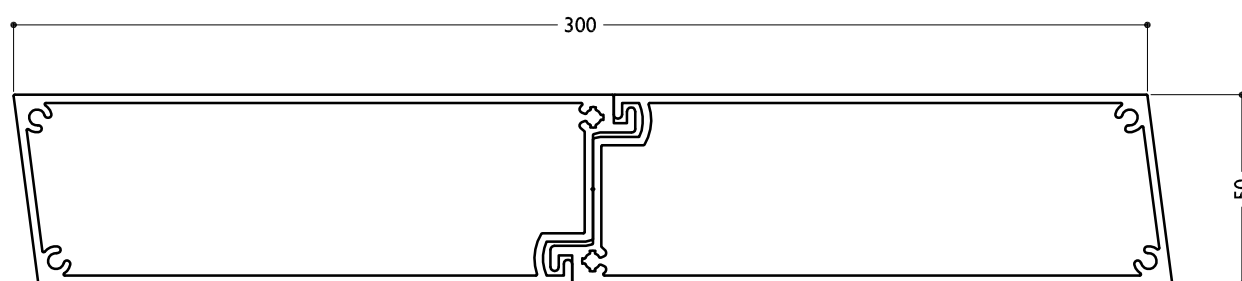

RL300 MITRE LOUVRE

NTS

BLADE SPECIFICATIONS			
Blade cover - opening system	307 mm	Weight per linear metre - opening system	5.45 kg/lm
Weight per square metre - opening system	18.5 kg/sqm	Actual blade width	300 mm
Blade centres - opening system	307 mm		

SPANS AT A GLANCE

Refer Engineering Section. Climate, terrain, shielding, location, type of structure contribute to determine spans.

WIND ZONE	INSIDE	LOW	MEDIUM	HIGH	VERY HIGH	EXTRA HIGH
Factored wind speed at building	Self wt	32 m/s 115 km/hr	37m/s 133 km/hr	44 m/s 158 km/hr	50 m/s 179 km/hr	55 m/s 198 km/hr
Fixed, Horizontal & Vertical	5800	5800	5800	5150	4500	4050

INSTALLATION OPTIONS



END FIXED


Louvres at any pitch
Louvres at any centre



BRACKET FIXED


Louvres at any pitch
Louvres at any centre

BLADE SPECIFICATIONS RL450 SQUARE & RL450 MITRE LOUVRES

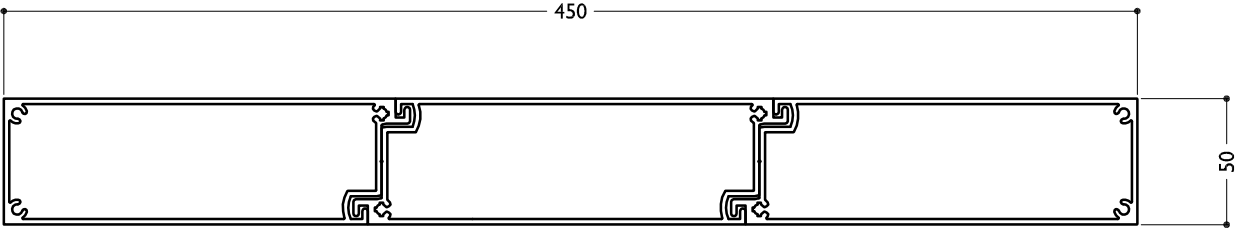

RL450 SQUARE LOUVRE

NTS

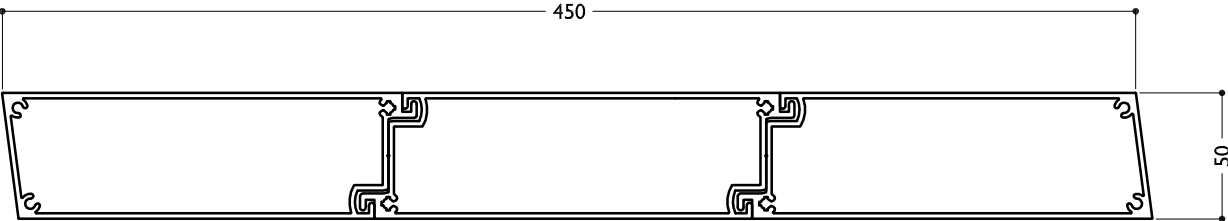

RL450 MITRE LOUVRE

NTS

BLADE SPECIFICATIONS			
Blade cover - opening system	457 mm	Weight per linear metre - opening system	8.27 kg/lm
Weight per square metre - opening system	18.5 sqm	Actual blade width	450 mm
Blade centres - opening system	457 mm		

SPANS AT A GLANCE

Refer Engineering Section. Climate, terrain, shielding, location, type of structure contribute to determine spans.

WIND ZONE	INSIDE	LOW	MEDIUM	HIGH	VERY HIGH	EXTRA HIGH
Factored wind speed at building	Self wt	32 m/s 115 km/hr	37m/s 133 km/hr	44 m/s 158 km/hr	50 m/s 179 km/hr	55 m/s 198 km/hr
Fixed, Horizontal & Vertical	5800	5800	5800	5150	4500	4050

INSTALLATION OPTIONS



END FIXED
Louvres at any pitch
Louvres at any centre



BRACKET FIXED
Louvres at any pitch
Louvres at any centre


SUN LOUVRES END FIXED

RL600 SQUARE LOUVRE & RL600 MITRE LOUVRE


(GROUP 6 LOUVRES COLLECTION)



BLADE SPECIFICATIONS RL600 SQUARE & RL600 MITRE LOUVRES

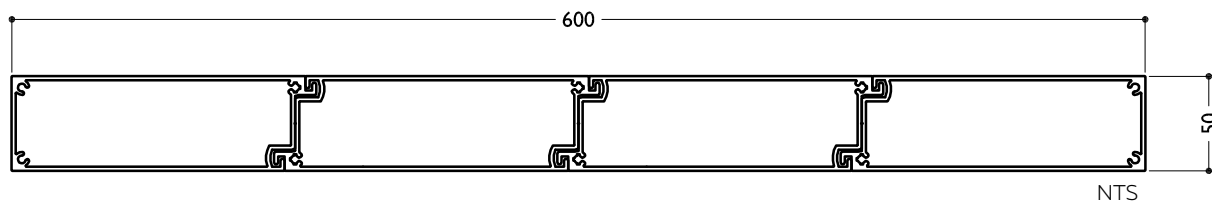

RL600 SQUARE LOUVRE

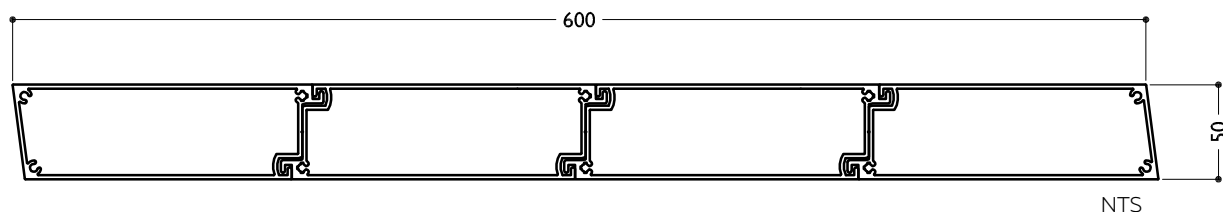

RL600 MITRE LOUVRE

BLADE SPECIFICATIONS			
Blade cover - opening system	607 mm	Weight per linear metre - opening system	11.10 kg/lm
Weight per square metre - opening system	19.0 sqm	Actual blade width	600 mm
Blade centres - opening system	607 mm		

SPANS AT A GLANCE

Refer Engineering Section. Climate, terrain, shielding, location, type of structure contribute to determine spans.

WIND ZONE	INSIDE	LOW	MEDIUM	HIGH	VERY HIGH	EXTRA HIGH
Factored wind speed at building	Self wt	32 m/s 115 km/hr	37m/s 133 km/hr	44 m/s 158 km/hr	50 m/s 179 km/hr	55 m/s 198 km/hr
Fixed, Horizontal & Vertical	5800	5800	5800	5100	4500	4050

INSTALLATION OPTIONS




END FIXED

Louvres at any pitch
Louvres at any centre




BRACKET FIXED

Louvres at any pitch
Louvres at any centre

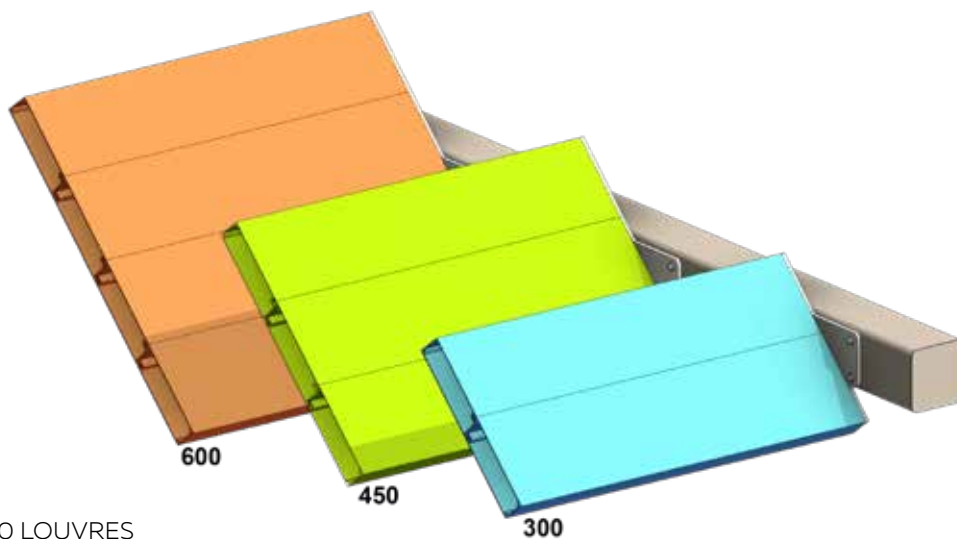

RL 300, RL 450, RL600 LOUVRES

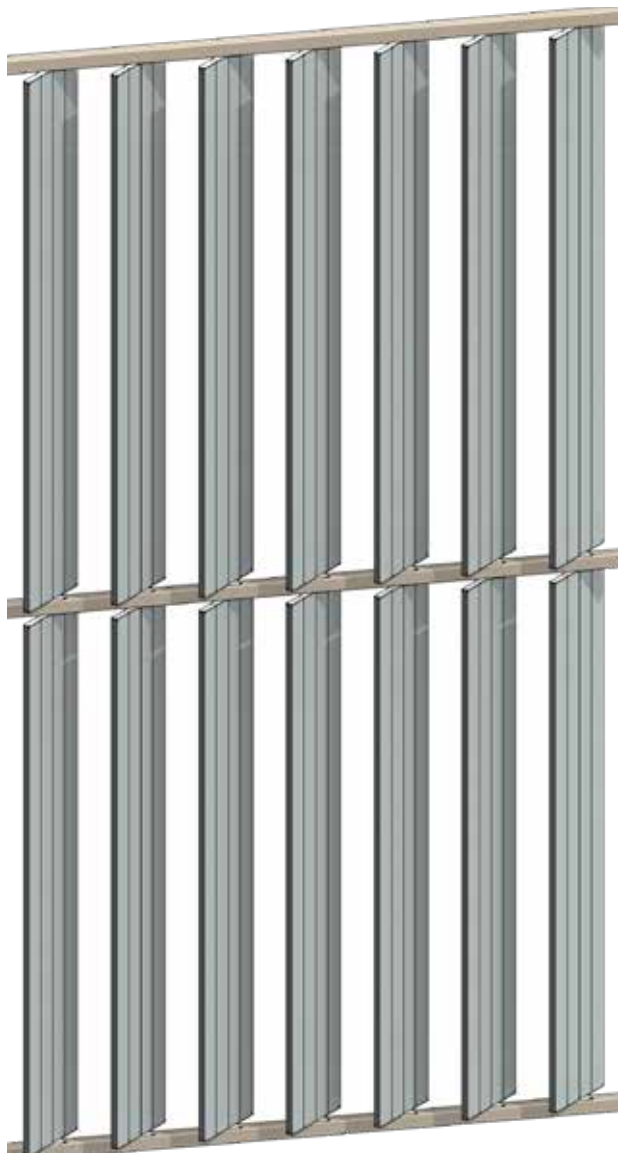

RL600 END FIXED LOUVRE PANEL



RL300 END FIXED LOUVRE PANEL, BRISBANE, QLD AU


TYPICAL DETAIL: END FIXED

RL 300 SQUARE, RL 450, RL 600 SQUARE LOUVRES

(GROUP 6 LOUVRES COLLECTION)

PLAN END FIXED


RL300 | RL450 | RL600 SQUARE LOUVRES

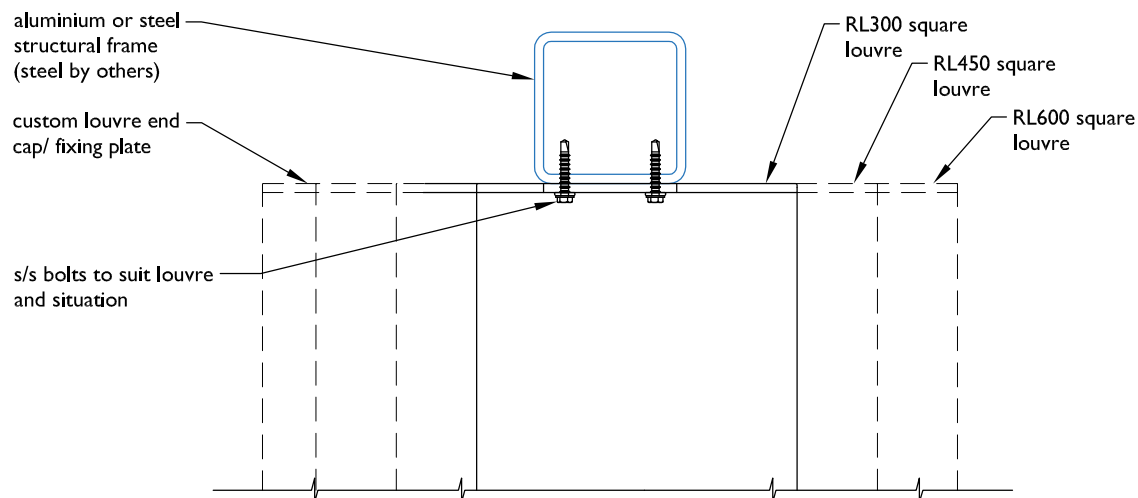


SECTION END FIXED

RL300 | RL450 | RL600 SQUARE LOUVRES

(GROUP 6 LOUVRES COLLECTION)

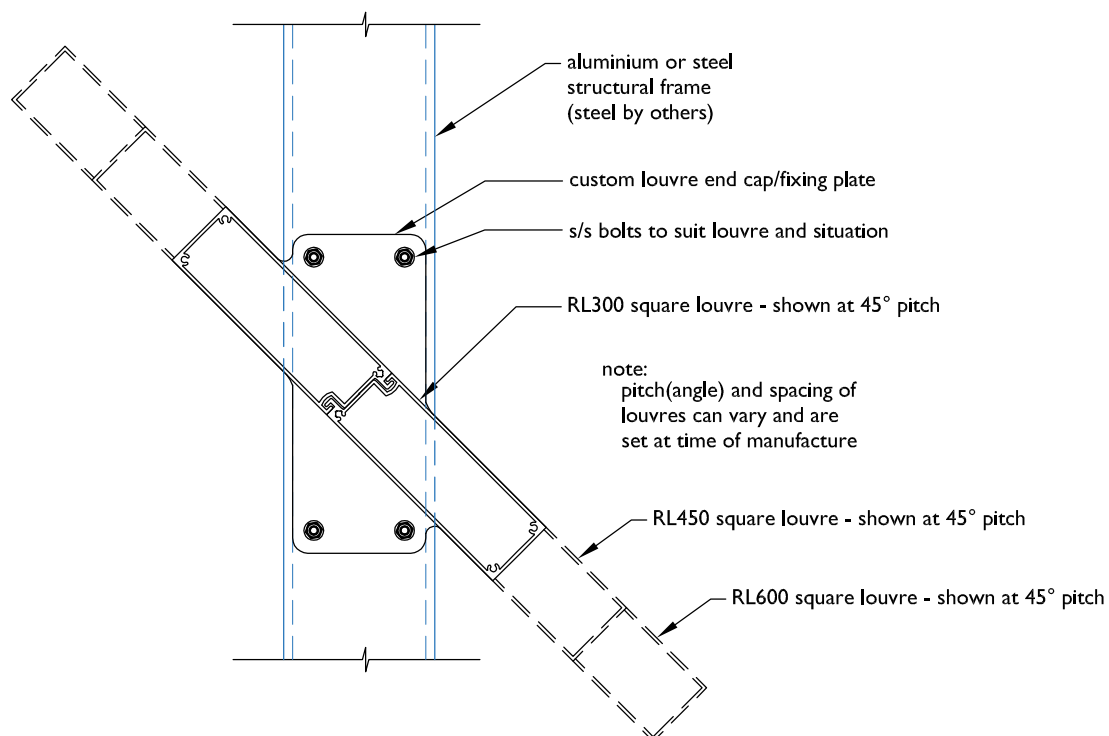


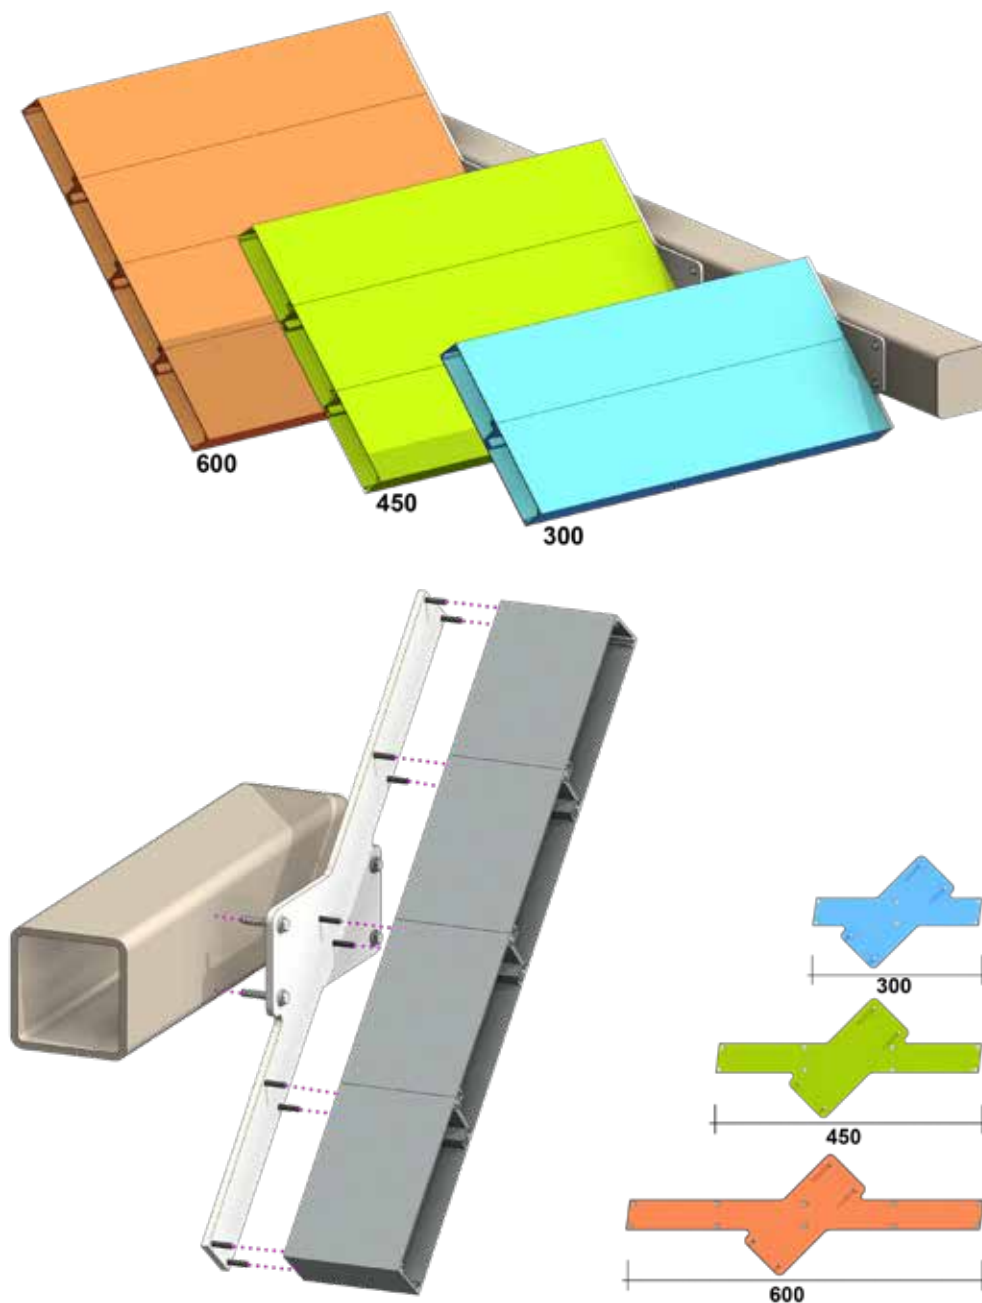

TYPICAL DETAIL: END FIXED
RL 300, RL 450, RL 600 MITRE LOUVRES

(GROUP 6 LOUVRES COLLECTION)

PLAN END FIXED
RL300 | RL450 | RL600 MITRE LOUVRES

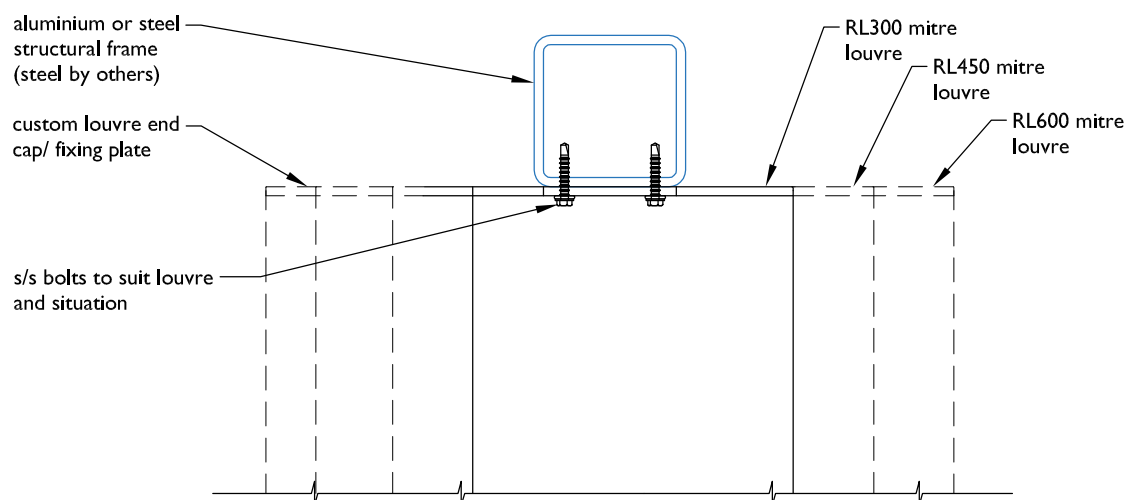

SECTION END FIXED
RL300 | RL450 | RL600 MITRE LOUVRES

